





DIMENSIONS

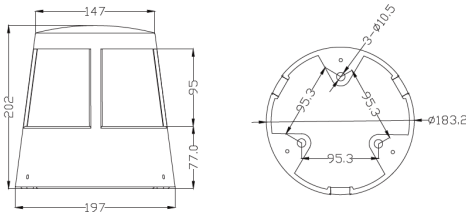

OPTICS

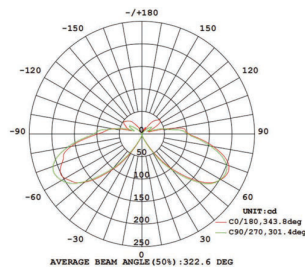

Product

Name	ARBOR 20W IP65 3000K
Reference	ARB403653
Color	Powder coated grey
RAL	
Category	BOLLARD

Light Source

Type	LED
Gross luminous flux	2000lm
Color temperature	3000K
Chromatic stability	MacAdam Step 3
Color Rendering Index	CRI>85
Power	40W
Current	550 mA
Efficacy	110 lm/W
LED lifespan	L80B10 >50.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	75%
Light beam angle	120°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Included – Connected
Power values of the system	20W
Voltage	220V/240V
Frequency	50/60 Hz
Electrical insulation class	Class II

OTHER DATA

Sealing	IP65
Dimming / Emergency Kits	Optional
Impact resistance	IK08
Recess measurements	197 x 202mm
Weight	2800g
Units per package	1
Materials	Die-cast aluminium
Diffuser	Clear anti-UV glass