





DIMENSIONS



OPTICS

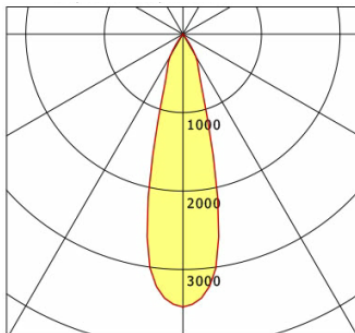

CE ROHS BIS

Product

Name	LORA IP66 3000K
Reference	LOR123K66
Color	Powder Coated Bronze
RAL	9005
Category	SURFACE

Light Source

Type	LED
Gross luminous flux	1260 lm
Color temperature	3000K
Chromatic stability	MacAdam Step 3
Color Rendering Index	CRI>80
Power	12W
Current	350 mA
Efficacy	105 lm/W
LED lifespan	L70B20 >50.000h

LIGHTING FIXTURE | PHOTOMETRIC DATA

Lighting efficiency	75%
Light beam angle	10° / 24° / 35° / 60°

LIGHTING FIXTURE | ELECTRICAL DATA

Driver	Not Included
Power values of the system	12W
Voltage	24/12VDC – 220-270VAC
Frequency	50/60 Hz
Electrical insulation class	Class II

OTHER DATA

Sealing	IP66
Dimming	Optional
Impact resistance	IK09
Recess measurements	115 x 316 x 65 mm
Weight	460g
Units per package	1
Materials	Die-Cast Aluminium
Diffuser	Hight Tempered Japanese Acrylic